


LIGHT LINE



QUADRO

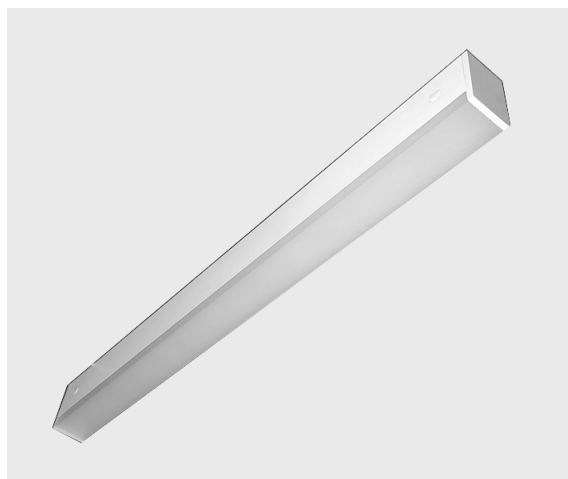

Type	Power	Supply	Luminous flux	Beam angle	Colour of light	Power factor	Dimensions L x W x H	Weight
	[W]	[V AC]	[lm]		[K]	[cosφ]	[mm]	[kg]
QUADRO-60-14-D	14	220-240	1700	120°	4000	>0,95	615x60x90	1,70
QUADRO-100-27-D	27	220-240	3250	120°	4000	>0,95	1015x60x90	2,30
QUADRO-120-38-D	38	220-240	4600	120°	4000	>0,95	1215x60x90	3,00
QUADRO-150-48-D	48	220-240	5800	120°	4000	>0,95	1515x60x90	3,60
QUADRO-200-54-D	54	220-240	6500	120°	4000	>0,95	2015x60x90	5,60
QUADRO-240-77-D	77	220-240	9250	120°	4000	>0,95	2415x60x90	6,20

A LED line luminaire (lighting line) for suspended or surface mounting. It offers an energy-saving and aesthetic solution for retail, offices, corridors as well as production and warehouse facilities. Housing made of aluminum profile, painted in white.

Opal or satin diffuser made of PC. The use of dedicated connectors enables luminaires to be easily configured into any line shapes. LED module with CRI≥80, over 50000 h life time. Operating in the emergency mode: fully charging accumulators batteries – 24h, operating in the emergency mode – 3h, luminous flux – approx. 700lm.

Option: LED's with CRI≥90, different colour of housing (RAL), dimming DALI system or other.

