


LIGHT LINE



# ZANDER

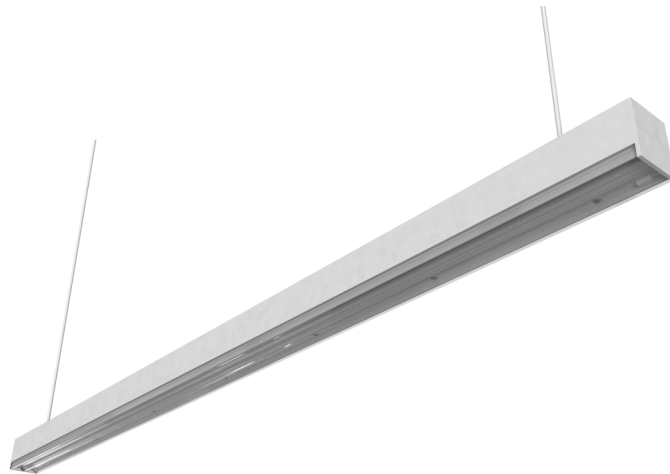

Type	Power	Supply	Luminous flux	Beam angle	Colour of light	Power factor	Dimensions L x W x H	Weight
	[W]	[V AC]	[lm]		[K]	[cosφ]	[mm]	[kg]
ZANDER-120-X-27-Y-D	27	220-240	3400	60°/180°/2x45°	4000	>0,95	1200x48x52	2,50
ZANDER-240-X-54-Y-D	54	220-240	6750	60°/180°/2x45°	4000	>0,95	2400x48x52	4,80
ZANDER-360-X-81-Y-D	81	220-240	10150	60°/180°/2x45°	4000	>0,95	3600x48x52	7,40
ZANDER-120-X-44-Y-D	44	220-240	5500	60°/180°/2x45°	4000	>0,95	1200x48x52	2,50
ZANDER-240-X-81-Y-D	81	220-240	10150	60°/180°/2x45°	4000	>0,95	2400x48x52	4,80
ZANDER-90-X-32-Y-D	32	220-240	4800	60°/180°/2x45°	4000	>0,95	900x48x52	2,10
ZANDER-120-X-30-Y-D	30	220-240	4500	60°/180°/2x45°	4000	>0,95	1200x48x52	2,50
ZANDER-120-X-40-Y-D	40	220-240	6000	60°/180°/2x45°	4000	>0,95	1200x48x52	2,50
ZANDER-240-X-60-Y-D	60	220-240	9000	60°/180°/2x45°	4000	>0,95	2400x48x52	4,80
ZANDER-240-X-80-Y-D	80	220-240	12000	60°/180°/2x45°	4000	>0,95	2400x48x52	4,80
ZANDER-270-X-90-Y-D	90	220-240	13500	60°/180°/2x45°	4000	>0,95	2700x48x52	5,40
ZANDER-360-X-90-Y-D	90	220-240	13500	60°/180°/2x45°	4000	>0,95	3600x48x52	7,40

A LED line of lighting. An energy-efficient and aesthetic solution for retail stores, offices, corridors as well as production and warehouse facilities. The use of dedicated connectors enables line profiles to be easily configured into attractive shapes such as a letter "T" or "L". Installation is available on steel cables or wall mounts.

Standard: white profile, milky diffuser, Ra≥80. Mounting elements not included.

Operating in the emergency mode: fully charging accumulators batteries – 24h, operating in the emergency mode – 3h, luminous flux – approx. 700lm.

Options: any RAL colors, Ra≥90, DALI or other controllers, dedicated spotlight.

Method of mark construction: X-beam angle (60, 180, 245); Y-type of power supply: without mark - last luminaire with 3-poles connector; 5T - through wiring (5-wire main line) with two 5-poles connectors.

